



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A47K 10/36		A1	(11) International Publication Number: WO 99/59457
			(43) International Publication Date: 25 November 1999 (25.11.99)
(21) International Application Number: PCT/US99/05732 (22) International Filing Date: 16 March 1999 (16.03.99) (30) Priority Data: 09/081,637 20 May 1998 (20.05.98) US (71) Applicant: GEORGIA-PACIFIC CORPORATION [US/US]; 133 Peachtree Street, N.E., P.O. Box 105605, Atlanta, GA 30348-5605 (US). (72) Inventors: FORMON, John, S.; 565 Golden Links Drive, Orange Park, FL 32073 (US). MORRIS, Andrew, R.; 3531 Olympic Drive, Green Cove Springs, FL 32043 (US). MURPHY, James, H.; 14 Versaggi Road, St. Augustine, FL 32084 (US). (74) Agents: SCHAD, Steven, P. et al.; Banner & Witcoff, LTD., 11th floor, 1001 G. Street, N.W., Washington, DC 20001-4597 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.	
(54) Title: PAPER TOWEL DISPENSER			
(57) Abstract			
<p>A powered dispenser (10) for dispensing individual paper towel segments from a continuous roll of paper provided with spaced lines of tearing comprises a housing, a support for the roll of paper (25), a feed mechanism (37), and a control device (38). The control device senses the presence of a user to activate the feed mechanism, controls the amount of material which is dispensed from the housing for any one cycle, and prevents further dispensing of the paper until the previous segment is separated from the roll. The control device detects the leading edge of the paper to initiate monitoring of the length of paper to be dispensed to prevent any cumulative error in dispensing the segments.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	JP	Japan	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	KE	Kenya	NL	Netherlands	VN	Viet Nam
CG	Congo	KG	Kyrgyzstan	NO	Norway	YU	Yugoslavia
CH	Switzerland	KP	Democratic People's Republic of Korea	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KR	Republic of Korea	PL	Poland		
CM	Cameroon	KZ	Kazakhstan	PT	Portugal		
CN	China	LC	Saint Lucia	RO	Romania		
CU	Cuba	LI	Liechtenstein	RU	Russian Federation		
CZ	Czech Republic	LK	Sri Lanka	SD	Sudan		
DE	Germany	LR	Liberia	SE	Sweden		
DK	Denmark			SG	Singapore		
EE	Estonia						

PAPER TOWEL DISPENSER

TECHNICAL FIELD

The present invention generally relates to paper towel dispensers and, more particularly, to a non-touch paper towel dispenser for dispensing a web of material from a roll.

BACKGROUND OF THE INVENTION

Dispensers for toweling have primarily been designed to dispense a continuous length of web material, folded paper towels, or rolls of paper towels. Continuous towels are generally made of a reusable material and form a towel loop outside of the dispenser cabinet for the consumer to use. Folded towels are paper towels which are pre-cut and folded into various configurations to be individually dispensed for use. Roll towels are continuous rolls of paper toweling which are wound around a central core and which are, upon dispensing, separated into and delivered as individual lengths of material.

Continuous web dispensers, such as those disclosed in U.S. Patent No. 2, 930,663 to Weiss and U.S. Patent No. 3,858,951 to Rasmussen, require the user to pull on the loop of exposed toweling in order to cause a length of clean toweling to be dispensed and the exposed soiled toweling to be correspondingly taken up within the dispenser. Although economical, the continuous exposure of the soiled toweling is deemed unsightly and, therefore, unacceptable to many consumers when compared to the many available alternatives. Further, the exposure and

possible reuse of soiled toweling may present additional health hazards and sanitation concerns which should be avoided.

The use of interfolded paper towels or C-fold paper towels eliminates the potential health risks associated with continuous web toweling. For instance, dispensers for folded paper towels, such as disclosed in U.S. Patent No. 3,269,592 to Siye et al., allow a user to dispense the towels by pulling on the exposed end of each new individual towel. These dispensers are also easy to refill with folded towels. However, a number of the folded towels will sometimes drop out of the lower opening of the dispenser when only the exposed towel is pulled, especially when the stack of towels in the dispenser is small. This can result in a significant waste of paper towels. Accordingly, folded towels are not as economical as other kinds of alternative dispensers.

Roll towels are cheaper to manufacture and produce less waste than folded towels. Roll towels also eliminate the potential health and sanitation problems associated with continuous web toweling systems. Dispensers for roll towels may include a lever, crank, or other user-activated mechanism for dispensing a length of towel, and a blade for severing the length of towel from the remaining roll. However, as can be appreciated, manual contact with a dispensing lever or the like raises health concerns for the user. To alleviate these health concerns, dispensers, such as U.S. Patent No. 4,712,461 to Rasmussen, eliminate contact with any part of the dispenser, and instead rely upon the user directly pulling the paper towel out of the dispenser. As a result, the paper towel must be provided with sufficient strength to effect rotation of the feed roller and actuation of the

blade without premature tearing. Paper possessing the requisite strength to operate the dispenser is limited in the amount of softness and absorbency which can be provided to the paper towels.

5 Dispensers for roll towels have also been electrically powered. As shown in U.S. Patent No. 5,452,832 to Niada, a light sensitive device is used to detect the presence of a user's hand in front of the dispenser and advance the toweling for a predetermined length of time. The dispensed length of paper towel is then separated from the continuous web by pulling the paper against a serrated cutting member. While the feed roller is powered, the cutting action still requires the
10 paper to possess a certain minimum strength and generally produces a rough, unsightly cut.

U.S. Patent No. 4,738,176 to Cassia discloses an electrically powered dispenser which also includes a reciprocating cutter to produce an individual towel from the continuous web of paper. While this arrangement enables the use of
15 softer and more absorbent paper, the dispenser requires a substantial amount of energy to drive the feed mechanism and the reciprocating cutter. Accordingly, the batteries must be replaced much more frequently. Moreover, the system is more complex and costly with its use of one-way clutches.

Also, in some electrically powered dispensers, such as U.S. Patent No.
20 4,796,825 to Hawkins, the paper will continually dispense while a hand or other object is placed in front of the sensor. Hence, the dispenser is subject to easy abuse and waste of paper. Moreover, some dispensers are subject to dispensing paper by the general proximity of a person irrespective of whether a paper towel

is needed. In an effort to avoid abuses, some dispensers, such as U.S. Patent No. 4,666,099 to Hoffman, have incorporated a waiting period where the dispenser will not operate for a brief time after each use. However, the need to wait can be frustrating to users under some circumstances.

5 **SUMMARY OF THE INVENTION**

The present invention is directed to an electrically powered dispenser which overcomes the disadvantages of the prior art.

10 In one aspect of the present invention, the dispenser facilitates the dispensing of a roll of paper with spaced apart transverse lines of tearing (e.g. perforation lines) for easily separating individual sheets from the continuous roll without cutting. As a result, paper with a high degree of softness and absorbency can be used without the high energy demands required by a reciprocating cutter.

15 In another aspect of the invention, the dispenser senses the leading edge of the continuous web of paper material to initiate a control device which controls the length of each segment of paper. In this way, the dispenser can always place the transverse tearing line at the proper position in relation to the discharge opening for each dispensed sheet, irrespective of variations of the spacing for the tearing lines within a tolerance range.

20 In another aspect of the invention, the dispenser includes a sensor for sensing the presence of a sheet which has been dispensed, but not removed, in order to prevent the dispenser from dispensing any more sheets until the previous sheet has been torn off. In this way, abuse of the dispenser and waste of the paper material can be minimized without requiring the use of a waiting period

wherein the dispenser will not operate. Accordingly, the dispenser is always ready for use.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a side diagrammatic view of the dispenser of the present invention with the cover in a closed position and showing a sheet segment of a web being dispensed.

Figs. 2 and 3 are flow diagrams showing flow control for operating a dispenser according to embodiments of the invention;

Fig. 3a is a portion of a routine for dealing with alarm conditions in the control flow shown in Fig. 3.

Figs. 4 is a block diagram showing control elements for controlling a towel feeder according to embodiments of the invention.

Figs. 5 and 6 are flow diagrams showing alternative jam clearing methods consistent otherwise with the control flow of Figs. 3 and 3a.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Referring to Figs. 1 and 4, a non-touch paper towel dispenser 10 according to the present invention comprises a chassis 12 which includes a back panel 14, side panels 16, and a pivotal front cover 20 attached by a pin, hinge, or other conventional attachment mechanism 20a (Fig. 1). Front cover 20 is opened to permit loading of a roll of paper material 25 into dispenser 10. The roll 25 consists of a continuous web of paper 27 wound upon a hollow, cylindrical core (not shown). In the preferred embodiment, the web 27 includes a series of spaced

apart, transverse tear lines to subdivide the web into sheet segments 42 of a predetermined length. Roll 25 is rotatably supported a pair of arms 35 extending forwardly from back panel 14. Each of the arms includes inwardly directed hub 35' loosely received within the core 38' of the roll 25 to permit free rotation of the roll 25. Nevertheless, other mounting arrangements could be used.

A feed mechanism 37 is mounted within the housing defined by chassis 12 to dispense the web 27 in incremental sheet segments 42. In the preferred construction, feed mechanism 37 includes a feed roller 22 and a pressure roller 24. Feed roller 22 and pressure roller 24 are mounted upon axles 45, 46, respectively, rotatably supported by side panels 16, 18. The pressure roller 24 is preferably biased against the feed roller by a spring (not shown) to define a feed nip 47 for dispensing the web 27 through a discharge opening 48. The discharge opening includes a towel sensor 38 as described below.

In use, feed roller 22 is driven by an electric motor 30 mounted within the dispenser. Specifically, a worm gear 52 is secured to drive shaft 54 of motor 30 to engage a drive gear 56 secured to axle 45 and rotate feed roller 22. When the paper web 27 is fed into nip 47, rotation of the feed roller (counter clockwise as viewed in Fig. 1) causes the web to be advanced around feed roller 22, through discharge opening 48. A guide plate 87 is provided to direct the web along the desired path. Low power requirements insure that the batteries 58 need only infrequent replacement. Other feed mechanisms having other roller and gear arrangements, or other power supplies, such as a step down AC to D.C. power supply, could be used.

When a roll 25 is loaded into dispenser 10, the leading edge 36 of web 27 is manually fed rearward between feed roller 22 and pressure roller 24. When front cover 20 is closed, a loading switch (not shown) may be engaged to activate motor 30 and automatically drive feed roller 22 in a direction (i.e. counter-clockwise as viewed in Fig. 1) to advance web 27 around feed roller 22 and to discharge opening 48. Alternatively, as described in the control embodiment of Fig. 2, a custodian can set up the roll 25 and web 27 such that the leading edge 36 is downstream of the sheet sensor 38. When cover closure is detected, the motor 30 will run in reverse to bring the leading edge 36 upstream of the sheet sensor 38 and then stopped (See discussion of Fig. 2, below, for further explanation). The custodian can use a forward and reverse jog switch 92 to position the leading edge where desired. While the loading switch is preferably actuated automatically upon closing of the cover, it could be manually actuated if desired. The leading edge 36 of the web material is advanced until detected by towel sensor 38 positioned in discharge opening 48. The towel sensor 38 is coupled with a microprocessor 53 or the like so that once the leading edge has been detected by sensor 38, motor 30 is reversed until the leading edge 36 of web 27 is clear of the range of sensor 38. This position places the leading edge 36 between the feed roller 22 and sensor 38. The towel sensor 38 may be any suitable mechanism, for example, a limit switch (not shown), an acoustical sensor (not shown), or an optical sensor 38 that includes an emitter and a photo diode that is occulted by the leading edge 36 of the web. In the latter example, the emitter may be pulsed and the output of the photodiode high-pass filtered. In this

way the effect of ambient light on the photodiode is compensated. This may be implemented directly through microprocessor 53.

The present invention is preferably used for dispensing web material with spaced apart tearing lines, such as prescored lines of perforation, resulting in sheet segments 42 of, for example, nine inches in length. Of course other lengths could be used depending on designer preference. By using a preperforated web material, the sheet segments can be easily separated from the web without requiring cutting of the web. The perforation tensile strength is light enough such that the web material can be easily separated in a smooth edge or some other desired or appealing edge. By avoiding the need for a cutter, energy may be conserved because the motor needs only to rotate the feed roller. Because the web 27 is power fed, minimum strength is required of the web. The web does not need to have sufficient strength to draw out additional portions as a leading portion is removed as in dispensers that require the web to be pulled out manually. Thus, the paper material of which the web is made can be soft and highly absorbent.

Dispenser 10 further includes a proximity sensor 40 that detects the presence of a user's hands or the like as the hand or hands approach the front of the dispenser 10. Sensor 40 may be any kind of suitable proximity sensor or switch. For hands free operation, sensor 40 may be a proximity sensor. A Proximity sensor 40 is coupled with microprocessor 53 to activate motor 30 when a hand is detected so as to drive feed roller 22 and thereby dispense a predetermined length of the web material. The dispensed web exits through

discharge opening 48, in order to be easily accessible to the user. The user then grasps the dispensed sheet segment 42 of web material and tears off the desired length of material along a prescored perforation line 72 (see Fig. 1). The leading edge 36 of the next sheet segment 42a is positioned between towel sensor 38 and feed roller 22. If the user dispenses, but does not separate it from the web, the towel sensor 38 detects the presence of the segment 42a. As long as sheet segment 29a is detected by sensor 38, the microprocessor will prevent further activation of motor 30. This discourages abuse of the dispenser and waste of the paper. Also, while the towel sensor 38 is described as a single, centrally positioned sensor in discharge opening 48, a pair of spaced towel sensors (not shown) could also be provided. In this case, even if the leading towel segment is irregularly torn, apart from the tearing line, only one towel sensor need be uncovered to enable activation of the motor.

As explained further below, dispenser 10 feeds a single sheet segment 42 of web 27 after detecting that a previously fed sheet segment has been separated from the web 27. To control the amount of web 27 fed so that one sheet segment only is fed, dispenser 10 employs a length detector 48 which establishes the amount of web fed during each dispensing cycle each time the motor is activated. The length detector 48 may be, for example, an encoder, either electromechanical or optical, that outputs a pulse for each increment of web dispensed. The length detector 48 may be coupled to microprocessor 53 and employed in controlling the dispenser 10 as discussed below. Another alternative to encoding successive incremental displacements of the web 27 is to detect the difference in

transmissivity of the web when a perforation line crosses an optical interrupter.

That is, an emitter-photodiode combination may be used to provide a signal that indicates a first level of light reception as web is fed and when the perforation crosses the light path. A pulse may be generated by the presence of the

5 perforations through the web. The microprocessor 53 may count the pulses generated by the length detector 48 where an encoder embodiment is employed

to dispense the proper amount of web material. For instance, when the tearing lines are nine inches apart, the microprocessor counts the corresponding number of pulses to dispense nine inches of the web 27. While a dispenser is preferably

10 set to dispense a roll with sheet segments (or a multiple of sheet segments) of a predetermined length, a switch, dial, button or other means could be used to

adjust the length of the dispensing cycle to meet different kinds of rolls. Also, other control devices could be used, including other counting arrangements or a timer device. Note that in the encoder embodiments of length detector 48, as

15 discussed below, cumulative error does not occur because cumulation of incremental lengths does not begin until the leading edge 36 is detected. Thus error can only accumulate over the span of a single sheet segment 42.

If a user pulls on the leading edge of the sheet segment being dispensed before the cycle has been completed, the motor 30 may stall due to the increased
20 load placed on the worm gear 52. The web 27 may be prevented from slipping about feed roller 22 when pulled because of the braking characteristic of the worm gear and the pinching engagement of the feed nip 47. When the motor stalls, the microprocessor 53 may store the cumulative displacement and reactivate the

motor to dispense the remaining portion of the sheet segment after a short pause (See Fig. 6 and attending discussion, below). Alternatively, the motor may be reversed so that the sheet segment is pulled upstream of the towel sensor 38 and fed forward again to register the portion of the leading edge again in preparation for a new dispensing cycle.

Referring to Fig. 2, control flow for embodiments of towel dispenser 10 may begin with the detection of an open cover or towel request at step S100. If a sheet request is made, control proceeds to step S105 where it is determined if a towel is present, that is, if a previously fed towel has not been torn off. If a towel is present, control returns to step S100 otherwise it proceeds to step S120 where the feed motor 30 is started in the forward feed direction. The feed motor 30 continues until in step S130, the leading edge of the towel is detected at which point, the length (displacement) detector 48 is initialized in step S140 so that the total displacement of the web 27 can be detected. The web 27 is advanced for the predefined displacement to expose one full towel sheet segment 42 in step S150 as indicated by the length detector 48. Next, in step S160, an exposure timer is initialized. Next, at step S170 optical sensor 38 is polled to determine if a towel has been removed within the duration of the exposure timer. If not, control loops until the exposure timer times out at step S180. If the towel is removed before the exposure timer times out, control returns to step S100. If the exposure timer times out in step S180, control proceeds to step S190 where the feed motor 30 is reversed to draw the towel back inside the dispenser 10. In step S190, the reverse feed continues for a short first interval to draw the leading edge back past the

towel sensor 38. If the towel edge was not detected due to some error in step S195, an alarm is set at step S110 and control proceeds to step S10. If the towel edge 36 is successfully detected (Step S190 may include a timer operation so that the program may wait for a predetermined period of time before proceeding to step S195), control returns to step S100. If a cover-open condition is detected in step S100, control also proceeds to step S10. The program pauses at step S30 until a cover closure is detected at step S30, whereupon control proceeds to step S90. In step S90, the feed motor 30 is reversed in an operation as in step S190. Then control returns to step S100 where the dispenser 10 waits for another sheet request.

Referring to Fig. 3, an alternative control flow begins when the dispenser is reset (either power on or pressing a reset button 91') whereupon control begins at step S205. In step S205, the processor 53 waits for a sheet request. As discussed above, this request may be made by a proximity sensor in one embodiment, or by some other type of switch or indicator. When a sheet request is made, control passes to step S210 where the sheet detector 38 is polled to determine if a sheet segment is still present having been ejected previously and not torn off. At step S220, if a sheet is detected, control returns to step S205. If the sheet is not detected, the feeder motor is started in step S225 and a watchdog timer initiated. Then in step S235, the sheet detector is polled and at step S240 if the sheet is detected, control proceeds to step S245. If the sheet is not detected, control loops back through steps S230 to S235 until the watchdog timer times out

in step S230 whereupon control branches to step S250 in which an alarm is set and the motor stopped to wait for reset.

Note that in step S235, the presence of the sheet is an indication of the leading edge of the web. Therefore, in step S245, the encoder pulse detector of the encoder embodiment (length detector 48) is zeroed and control flows to step S280. In step S280, another watchdog timer is started and the processor waits for each encoder pulses by looping through steps S285 and S260. If the watchdog timer times out between pulses, control branches out of this loop to step S255. Each time a pulse is detected, control flows to step S290 where the pulse counter is checked against the cumulative count of pulses thus far. If the cumulative count is short of the number corresponding to a full sheet, control returns to step S280. If all the pulses are cumulated through the S280, S285, S290 loop, control proceeds to step S295 where the motor is stopped. Control then returns to step S205.

If the watchdog timer in step S260 times out, control proceeds to step S255 where the feed motor 30 is reversed and another watchdog timer is initiated. The sheet detector is polled and control loops through steps S265 and S275 until either the watchdog timer times out or the edge is detected. If the edge is detected the feed motor continues in reverse for a short interval to bring the sheet edge upstream of the optical sensor (sheet detector) in step S270. Then control proceeds to step S225. If the watchdog timer times out in step S275, control proceeds to step S250.

Note that in either of the above control embodiments or any others (Figs. 2 or 3), a routine may be included to insure prevention of more than a predefined number of sheets from being dispensed within a specified time interval. If more than this predefined number of requests is made, the controller may be programmed to ignore the request until the lapse of a timer. So, for example, if
5 more than three requests are made in a 10 second period, the processor can wait until the expiration of the ten second interval or for the expiration of a new 10 second interval after the third request. This is an abuse deterrent.

Note that discharge opening 48 defines an access that is narrow enough
10 to prevent a user's fingers from reaching the leading edge 36 of the web 27 when the dispenser 10 is waiting for a request for a new paper sheet segment. The towel sensor 38 is located between the access defined by the discharge opening 48 and the blind end defined by a feedthrough between feed roller 22 and an arcuate guide plate 87. With this arrangement, the towel sensor is hidden from
15 interference by ambient light. Also, the perforation line 72 is located downstream of the blind end so that a sheet segment 42 can be torn away from the web 27. The perforation line 72 is above the towel sensor 38 when the dispenser 10 is waiting for a request. In this way the towel sensor 38 registers the position of the leading edge 36 shortly after the motor 30 starts feeding forward.

20 The control flow starting with step S255 is for the purpose clearing a jam. Referring to Fig. 5, an alternative way of dealing with the timeout in step S260 of the watchdog timer begins at step S355 where the feed motor 30 is reversed. Control loops through step S365, until the encoder pulses are cumulated for a

short number of counts, perhaps only one or two. Thus, the feed motor is reversed for only a short interval of reverse displacement. The count of the forward feed operation is then adjusted in step S370 and the feed-forward operation resumed at step S280. Thus, if two backward pulses are used for this correction, the cumulative count employed in step S290 would be decremented by two to make up the difference.

Another alternative way to deal with a jam is to simply pause the forward feed operation. Referring to Fig. 6, in step S455, the feed motor 30 is stopped and a delay timer initiated. Control loops through step S465 until the delay timer times out and the feed motor is restarted in step S470. After that control returns to step S280.

Referring to Fig. 4, a block diagram showing the various sensors and controls that may be connected to microprocessor 53, according to the various embodiments discussed above, is shown.

It will be obvious to one of ordinary skill in the art that numerous modifications may be made without departing from the true spirit and scope of the present invention, which is to be limited only by the appended claims.

CLAIMS

1. A dispenser for flexible sheet material comprising: a support for rotatably supporting a roll of sheet material; a feed mechanism for advancing the sheet material; a motor for driving the feed mechanism;

5 a control device for powering said motor to drive said feed mechanism so as to dispense a predetermined length of the sheet material; and

a sensor for detecting a leading edge of said sheet material and activating said control device.

2. The dispenser of claim 1, wherein said feed mechanism includes a feed roller driven by said motor and an opposing pressure roller between which
10 the sheet material is passed.

3. The dispenser of claim 2, wherein said feed mechanism further includes a drive gear and a rotatable axle to support said feed roller and said drive gear, and said motor is provided a worm gear engaged with said drive gear.

15 4. The dispenser of claim 2, wherein said control device includes an encoder for determining the predetermined length of sheet material.

5. The dispenser of claim 2 further comprising a housing with a discharge opening, said support and said feed mechanism being within said housing.

20 6. The dispenser of claim 5, wherein said sensor is positioned between said feed roller and said discharge opening.

7. The dispenser of claim 1 further comprising a housing with a discharge opening, said support and said feed mechanism being within said housing.

8. The dispenser of claim 1, wherein said sensor is a photo-detector device.

9. The dispenser of claim 1, wherein said control device includes a counter device.

10. The dispenser of claim 1, wherein said control devices includes a timer device.

11. The dispenser of claim 1, further comprising an activation sensor for sensing the presence of a user and activating said motor.

12. The dispenser of claim 11, further comprising means for preventing activation of said motor when said sensor detects a dispensed but unremoved segment of the sheet material.

13. The dispenser of claim 1, further comprising means for preventing activation of said motor when said sensor detects a dispensed but unremoved segment of the sheet material.

14. A dispenser for flexible sheet material comprising:

a feed mechanism for dispensing a first segment of the sheet material;

a sensor for sensing the presence of a user, said sensor activating said feed mechanism for advancing the web of sheet material in response to sensing the user; and

a controller for preventing said feed mechanism from dispensing a second segment of the sheet material through said discharge opening until the first segment of sheet material has been removed.

5 15. The dispenser of claim 14, wherein said controller includes a sensor for sensing the presence of the first segment of the sheet material when dispensed but not removed.

16. The dispenser of claim 14, wherein said activating sensor includes a light sensitive sensor.

10 17. The dispenser of claim 14, wherein said feed mechanism includes a motor.

18. The dispenser of claim 17, wherein said controller includes a device for controlling the length of the first segment of the sheet material, said control device terminating the actuation of said motor when a predetermined length of sheet material has been dispensed.

15 19. The dispenser of claim 12 further comprising a housing with a discharge opening, said support and said feed mechanism being within said housing.

20 20. The dispenser of claim 14, wherein said feed mechanism includes at least one feed roller to dispense to the sheet material and a motor to drive said feed roller.

21. A dispenser for dispensing sheets defined by perforations in a roll of paper held thereby, said dispenser comprising:

a motorized feed mechanism with an output end from which a leading end of said roll of paper is fed to make at least one of said sheets accessible to allow said user to remove said at least one of said sheets from a remainder of said roll;

a controller connected to control said feed mechanism and configured to feed said at least one of said sheets responsively to an input generatable by said user;

a sheet detector connected to said controller and configured to indicate whether a fed one of said at least one of said sheets is removed from said remainder of said roll;

said controller being further configured to retract said at least one of said sheets after a lapse of a predefined interval and responsively to said sheet detector.

22. A dispenser as in claim 21, wherein said sheet detector is positioned to detect a presence of said at least one of said sheets adjacent said output end.

23. A dispenser as in claim 21, wherein: said dispenser has a housing with an opening at said output end, said opening having a blind end and an access, said access being sufficiently narrow to prevent manual access by said user therethrough;

said controller is configured to feed one of said sheets for each of said inputs and further configured to feed just enough of said roll, such that a perforation line separating said one of said sheets is held, after of feeding of said feed mechanism, between said access and said blind end, whereby, when said one of said sheets is separated from said remainder at said perforation line, a new

leading end defined as a result, is guarded against access by said user until a new input by said user.

24. A dispenser for dispensing sheets defined by perforations in a roll of paper held thereby, said dispenser comprising:

5 a housing with an opening, said opening having a blind end and an access, said access being sufficiently narrow to prevent manual access by a user therethrough;

 a motorized feed mechanism with an output end from which a leading end of said roll of paper is fed to make at least one of said sheets accessible to allow
10 said user to tear said at least one of said sheets from a remainder of said roll;

 a controller connected to control said feed mechanism and configured to feed said at least one of said sheets responsively to an input generatable by said user;

 said controller being further configured to stop said feed mechanism at a
15 point at which said perforation line is held between said access and said blind end, whereby, when said one of said sheets is separated from said remainder at said perforation line, a new leading end defined as a result, is guarded against access by said user until a new input by said user.

25. A dispenser as in claim 24, wherein:

20 said controller includes a paper leading edge detector between said access and said blind end;

said controller including a displacement encoder connected to said feed mechanism to detect successive increments of a feeding of said paper by said feed mechanism;

5 said leading edge detector being positioned such that a detection of said leading edge after said feed motor is started and a continued running of said feed motor subsequent to said detection for a predefined number of said increments is effective to position new leading edge at said point.

26. A dispenser for dispensing sheets defined by perforations in a roll of paper held thereby, said dispenser comprising:

10 a motorized feed mechanism with an output end from which a leading end of said roll of paper is fed to make at least one of said sheets accessible to allow said user to tear said at least one of said sheets from a remainder of said roll;

15 a controller connected to control said feed mechanism and configured to feed said at least one of said sheets responsively to an input generatable by said user;

 said controller including a plurality of paper leading edge detectors;

 said controller including a displacement encoder connected to said feed mechanism to detect successive increments of a feeding of said paper by said feed mechanism;

20 said leading edge detectors being positioned such that a detection of said leading edge by at least one of said leading edge detectors after said feed motor is started and a continued running of said feed motor subsequent to said detection for a predefined number of said increments is effective to position new leading

edge at said point, whereby said leading edge is detected even if said leading edge is not defined by a contour of said perforation.

27. A method of dispensing a flexible sheet material having spaced apart, transverse tearing lines from a dispenser, said method comprising:

5 activating a motor to advance a predetermined length of the sheet material from a dispenser;

 sensing the leading edge of the advancing sheet material to control the amount of sheet material to be dispensed; and

 tearing a leading segment of the sheet material along one of the tearing
10 lines.

28. The method of claim 27, further comprising preventing the advancing of additional sheet material until the advanced segment of sheet material has been torn off.

29. The method of claim 27, wherein said motor is activated by sensing
15 the presence of a user.

30. A method of dispensing a flexible sheet material comprising sensing the presence of a user, activating a motor to advance a first segment of a sheet material from a dispenser when the presence of a user is sensed, and preventing further advancement of the sheet material until said first segment is removed from
20 the sheet material.

31. The method of claim 30, further comprising sensing of the first segment when dispensed but not removed from the sheet material.

32. The method of claim 30, further comprising sensing a leading edge of the advancing first segment and dispensing a predetermined amount of sheet material from said sensing of the leading edge.


33. A method of controlling a powered towel dispenser that feeds separate sheets defined by perforations in a roll of towel material held by said dispenser, said method comprising the steps of:


detecting a request for a sheet of said towel;

power-feeding said towel material from said roll responsively to said step of detecting;

detecting a leading edge of said towel material and triggering a counting of counting successive incremental feedings of said towel material by an encoder responsively to second step of detecting and terminating said power-feeding when said a count resulting from said counting reaches a predefined value, said predefined value being effective to dispense a single one of said separate sheets.

34. A method as in claim 33, further comprising the steps of pausing after said step of terminating and reversing said power-feeding after a lapse of a predefined interval of time where by said single one of said separate sheets is withdrawn into said dispenser.

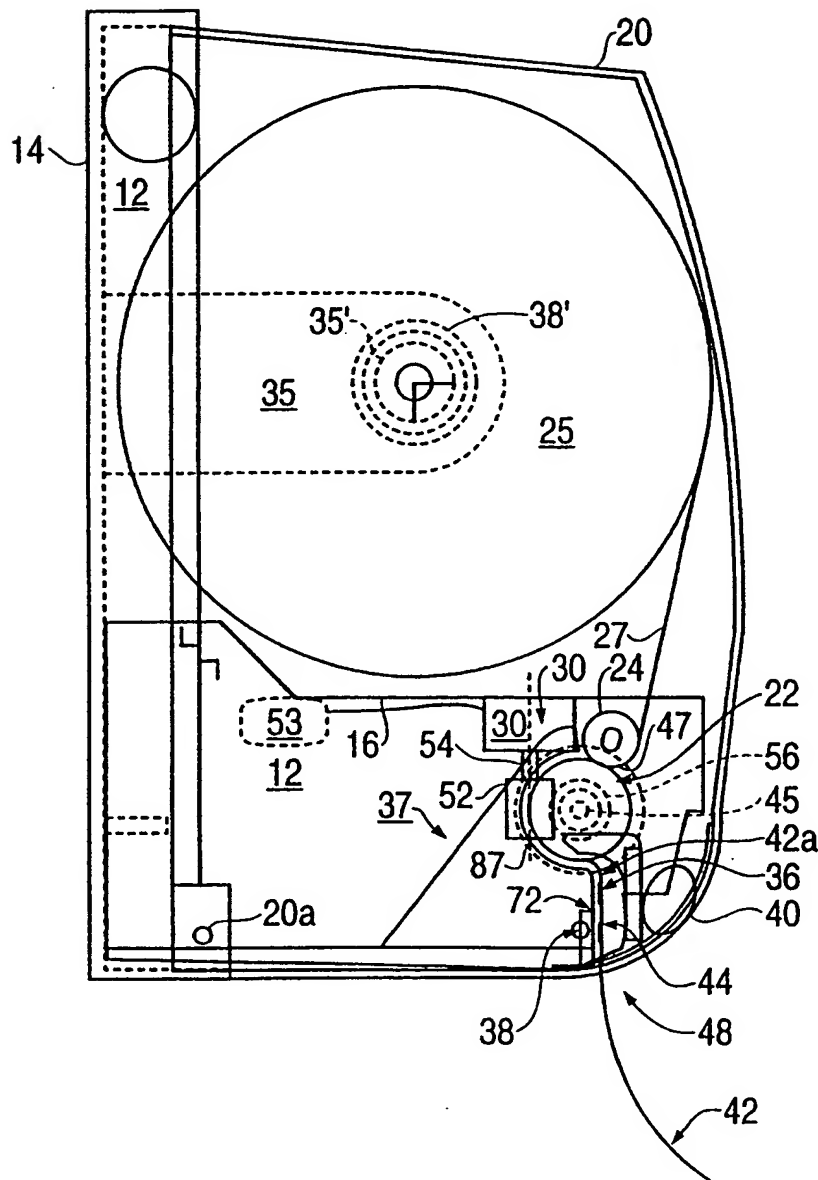FIG. 1

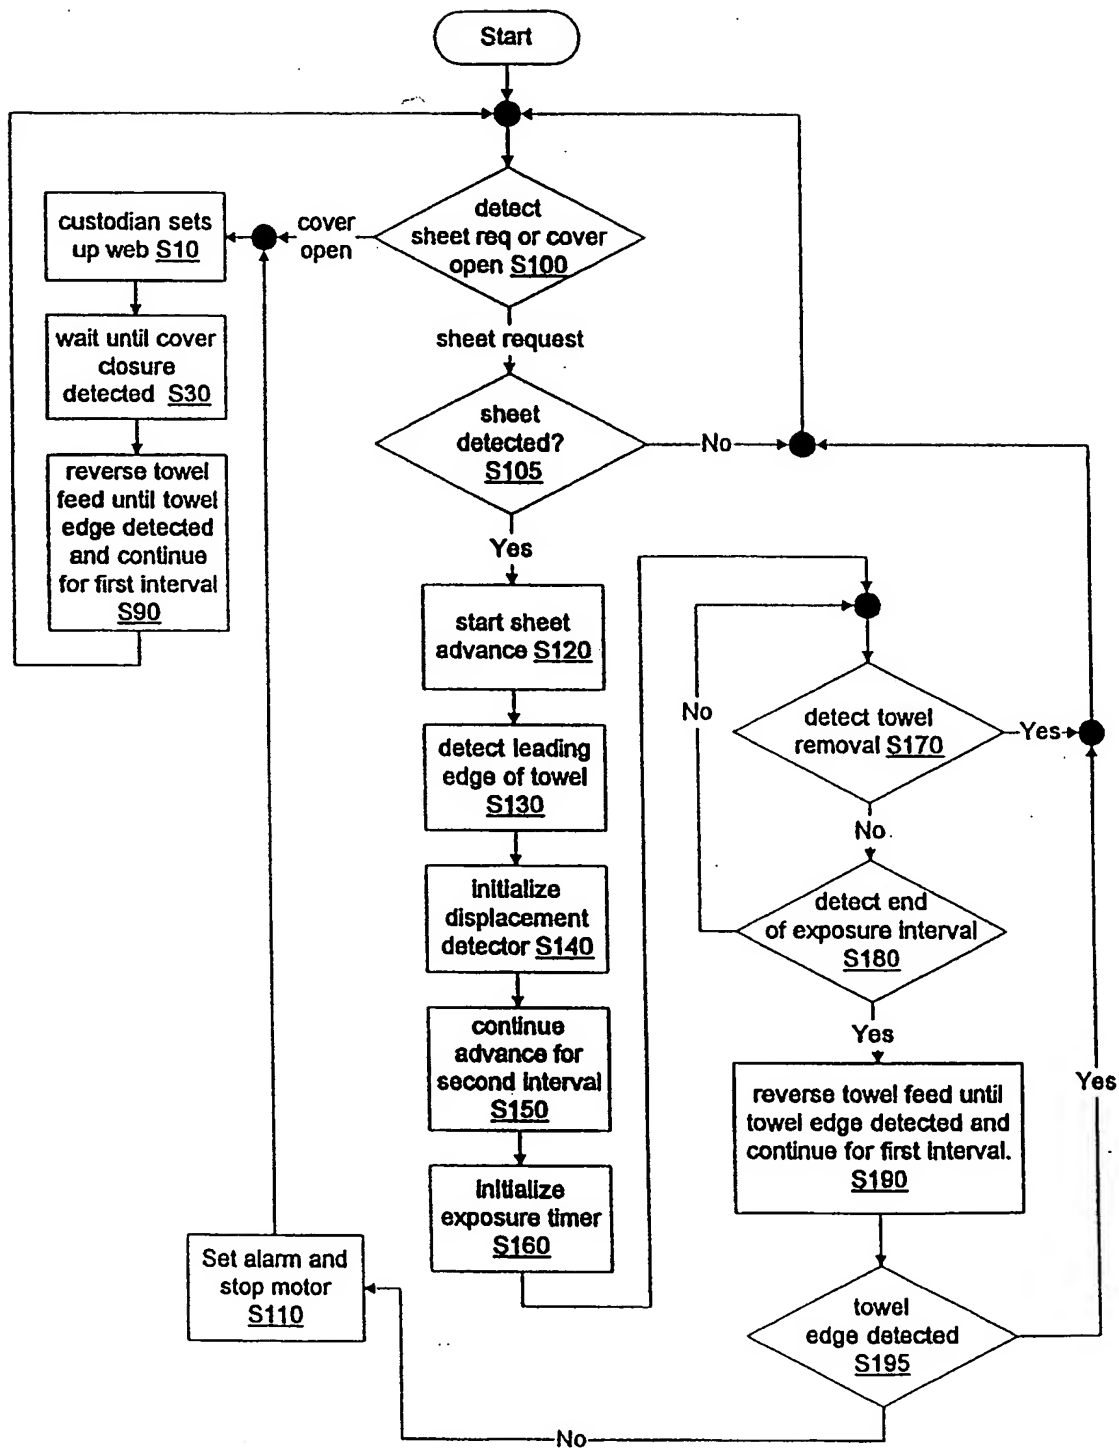2/6
FIG. 2

3/6

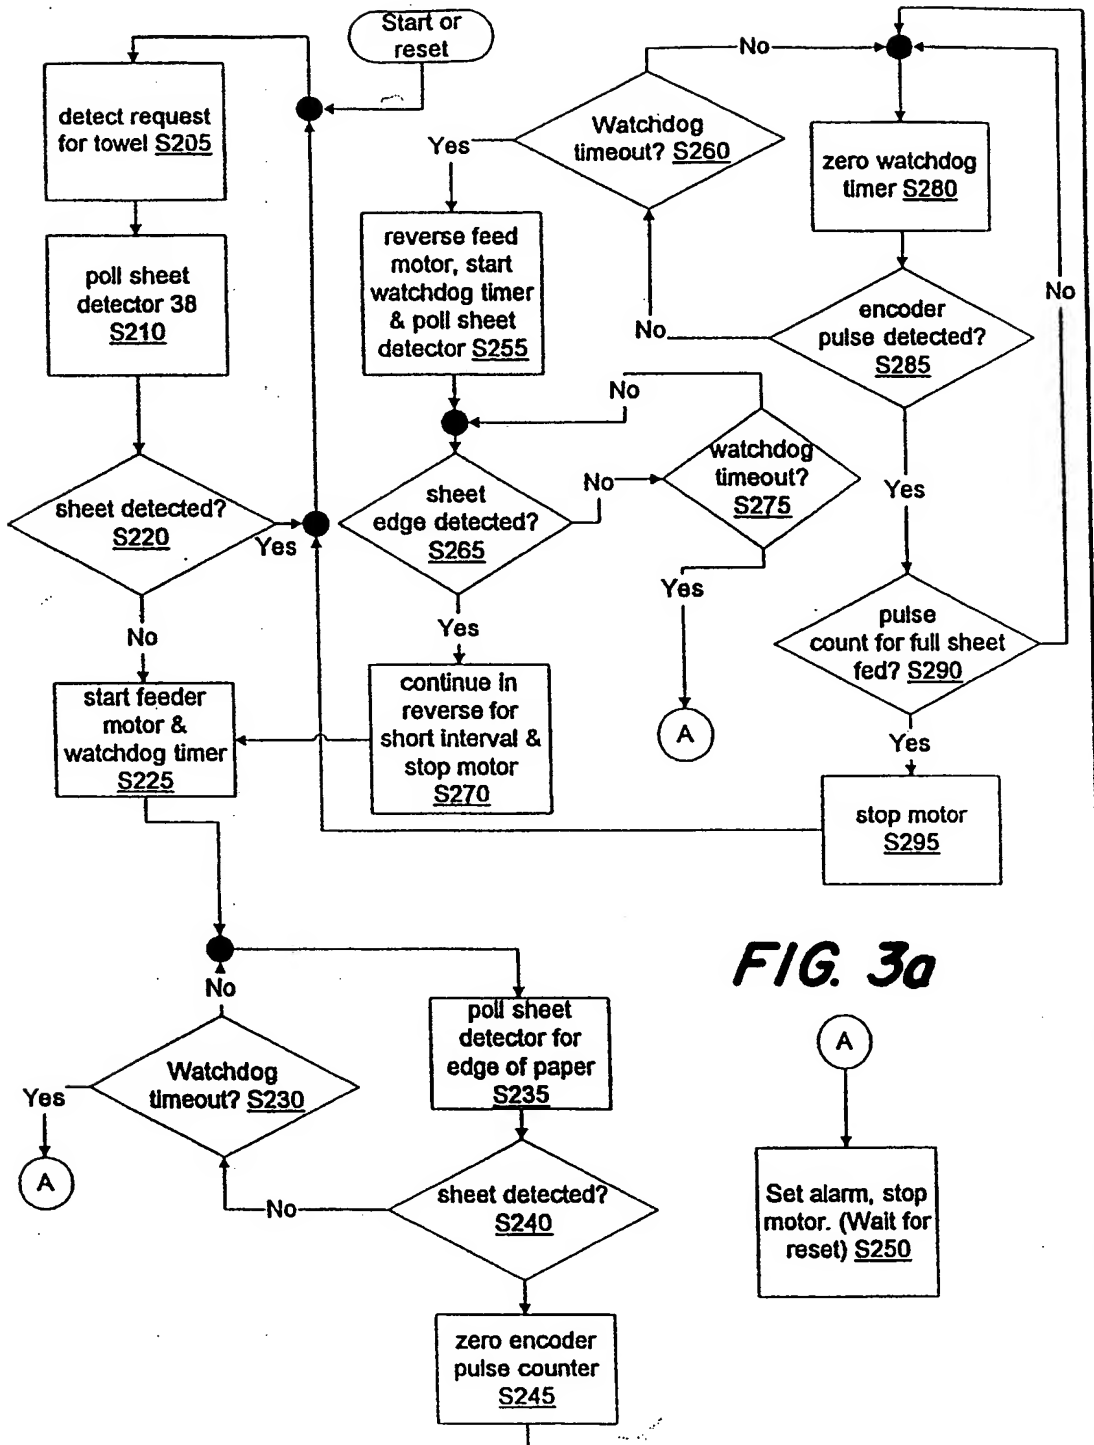
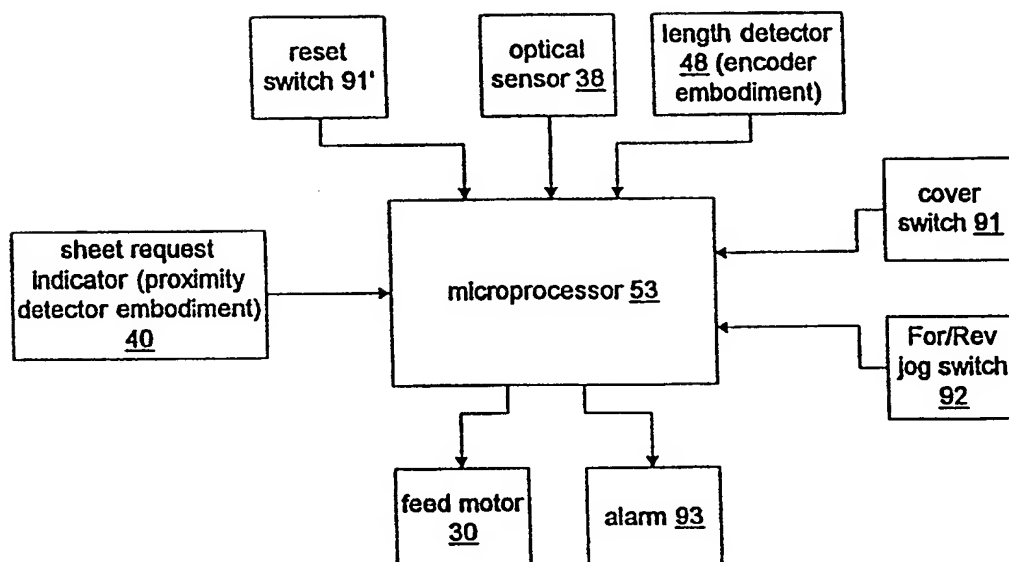
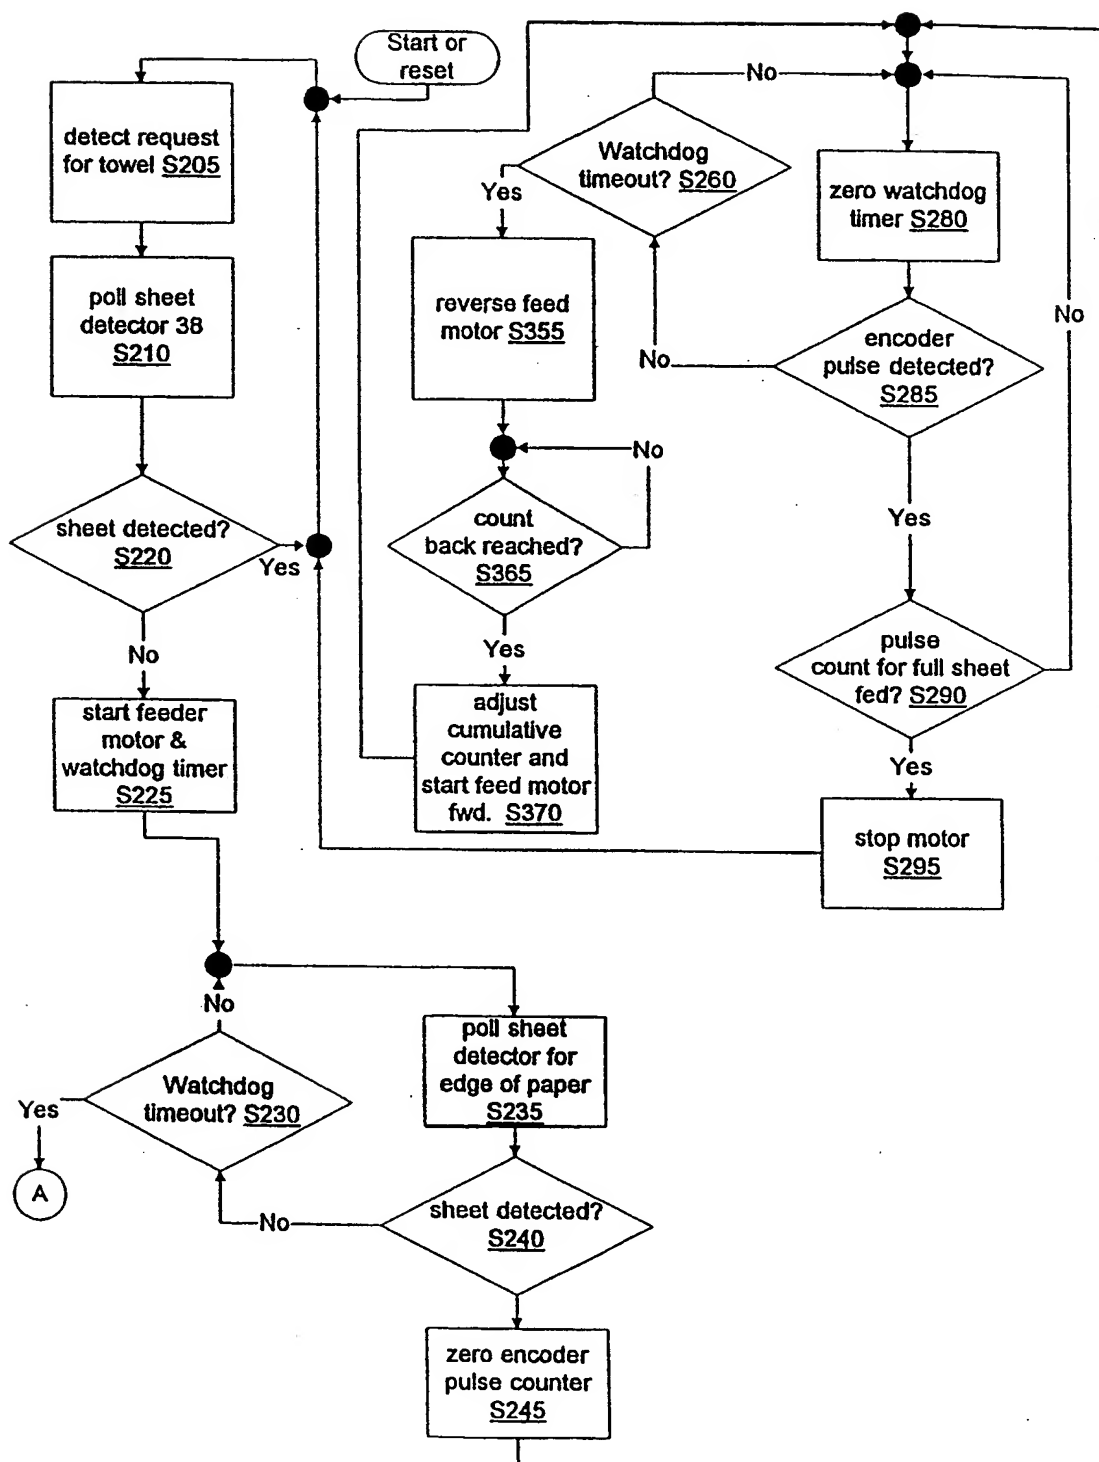
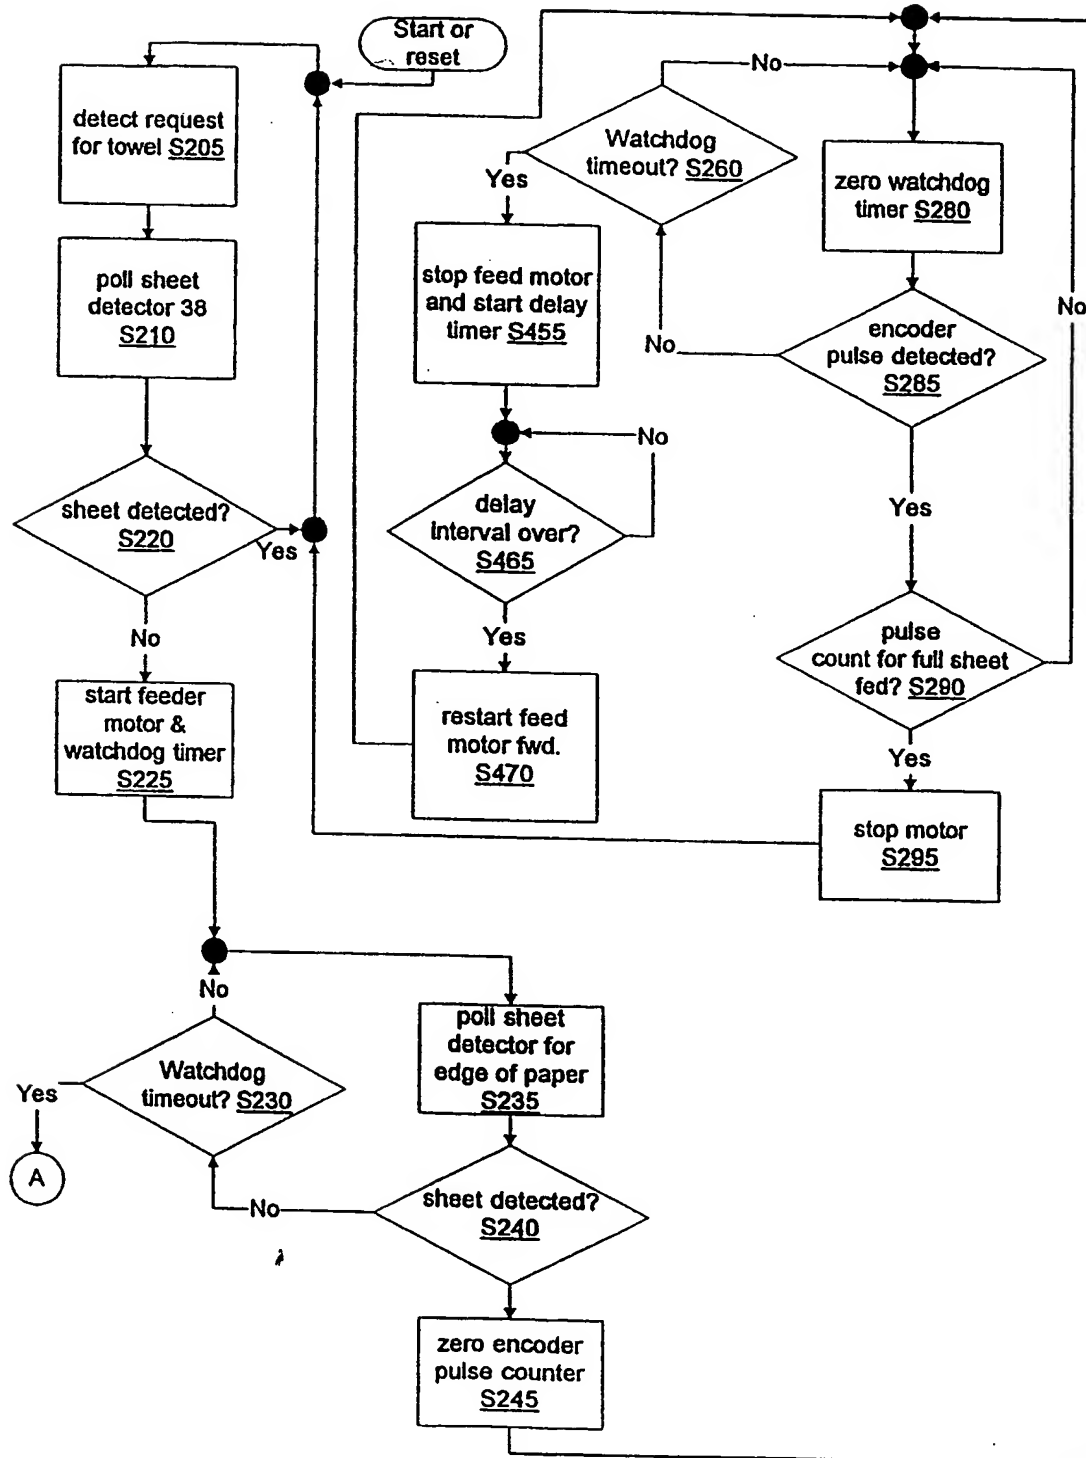
FIG. 3**FIG. 3a**

FIG. 4

5/6

FIG. 5

6/6

FIG. 6

INTERNATIONAL SEARCH REPORT

Interns. Application No
PCT/US 99/05732

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A47K10/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A47K B65H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 960 248 A (BAUER ALBERT H ET AL) 2 October 1990	1,2,4,5, 7,8, 10-14, 17-20, 24,30
A	see column 2, line 49 - column 4, line 2 see column 5, line 1 - line 8 see figures 1,2	21,23, 26,27, 33,34
X	DE 33 42 921 A (TRATZ LEONHARD) 5 June 1985	1,7,21, 24,25, 27,28, 33,34
A	see page 6, line 3 - page 7, line 9 see figure --- -/--	14,26,30

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

15 June 1999

Date of mailing of the international search report

23/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vrugt, S

INTERNATIONAL SEARCH REPORT

Intern. Application No
PCT/US 99/05732

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 4 666 099 A (HOFFMAN LOUIS S ET AL) 19 May 1987 cited in the application see column 3, line 20 - column 5, line 16 see figures 1-5 -----	14, 16-20,30 1,2,7,8, 10,11

INTERNATIONAL SEARCH REPORT

Information on patent family members

Interns: 4 Application No

PCT/US 99/05732

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4960248 A	02-10-1990	NONE	
DE 3342921 A	05-06-1985	NONE	
US 4666099 A	19-05-1987	AU 633024 B	21-01-1993
		AU 4150089 A	25-01-1990
		AU 590350 B	02-11-1989
		AU 6500086 A	21-05-1987
		BR 8606001 A	15-09-1987
		CA 1263348 A	28-11-1989
		DE 3687043 A	03-12-1992
		EP 0235446 A	09-09-1987
		JP 62157155 A	13-07-1987
		MX 165079 B	21-10-1992
		US 4786005 A	22-11-1988